


DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS, INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION OF TROMPETER ELECTRONICS, INC.

REVISIONS		010-0111	SH 1
REV	DESCRIPTION	DATE	APPROVED
M	REVISED PER ECD 15699	11/10/04	<i>[Signature]</i>

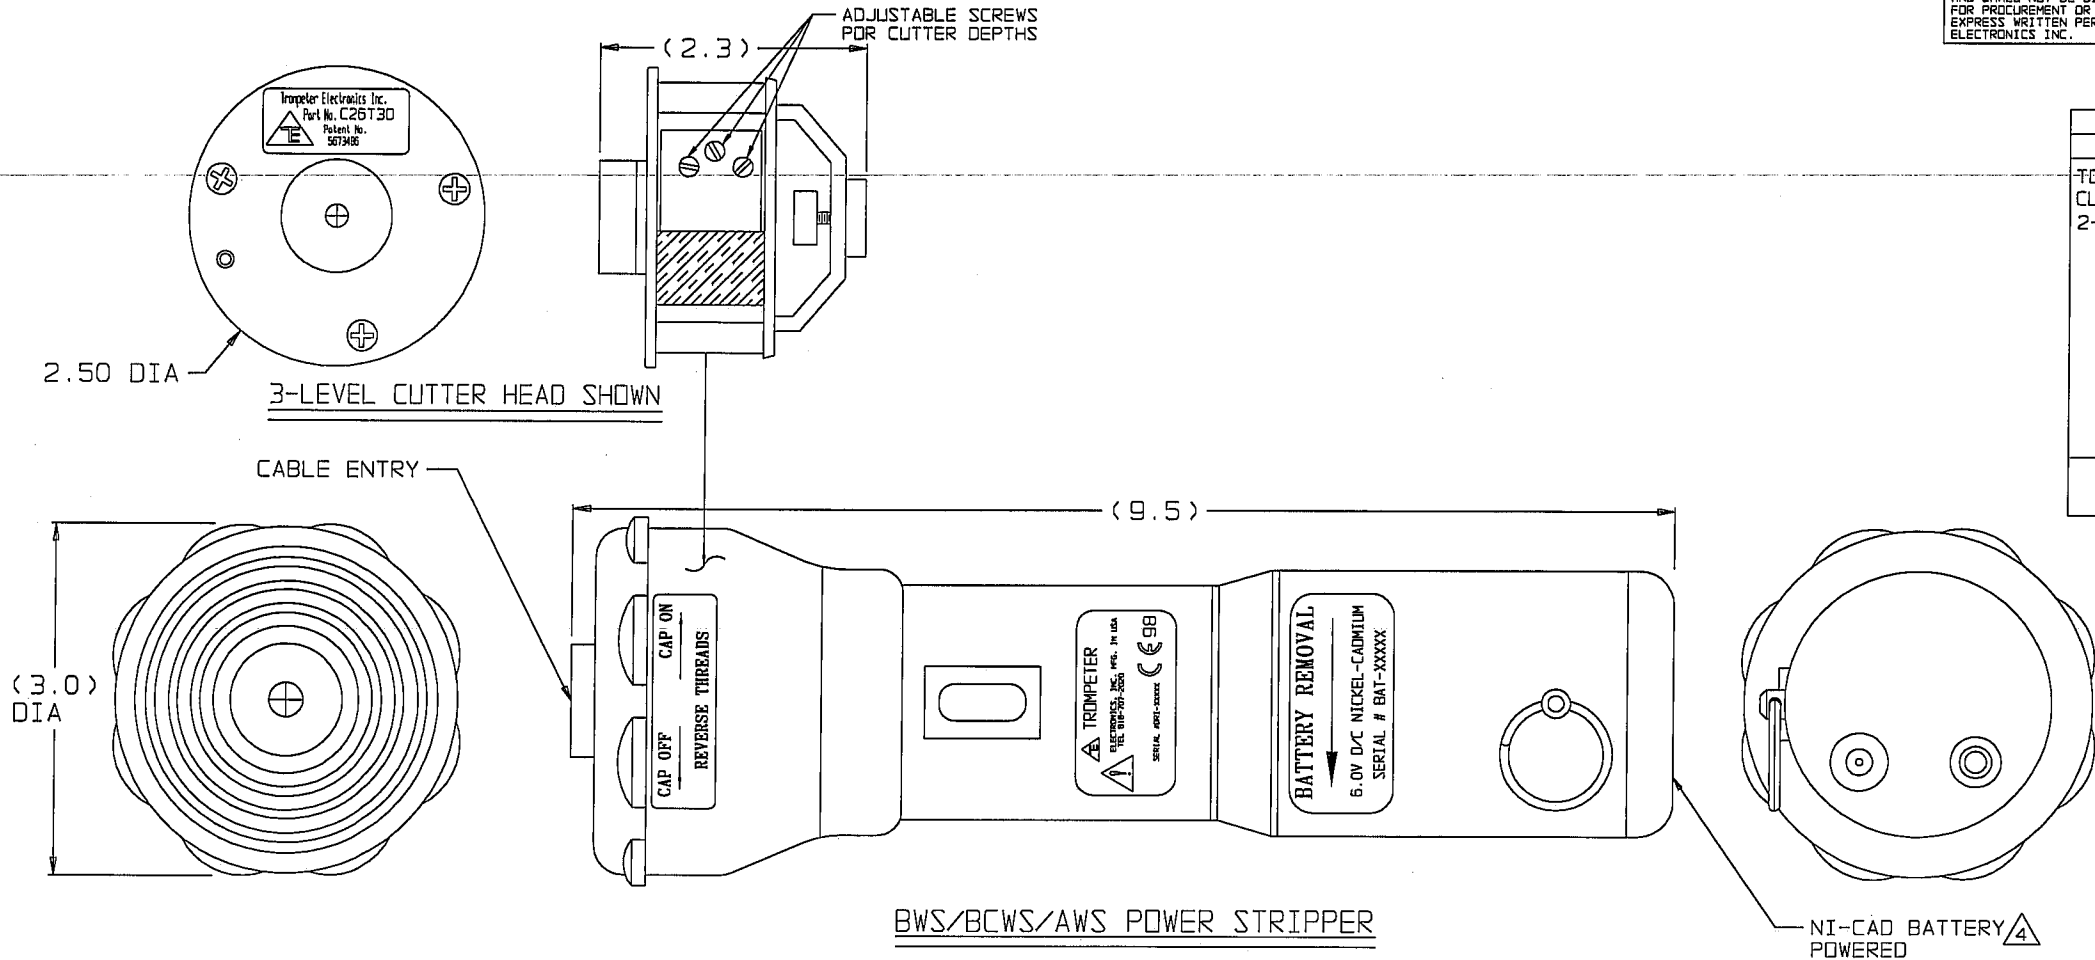

C26T		C26F
TOOL-CRIMP 3-LEVEL CUTTER HEAD FOR BNC AND 2-STEP CRIMP "F" SERIES	WRENCH-CRIMP 2-LEVEL CUTTER HEAD BNC SERIES	TOOL-CRIMP 2-LEVEL CUTTER HEAD FOR BNC AND 1-STEP CRIMP "F" SERIES
LETTER CODE E ONLY		
STRIPPING INSTRUCTIONS		
SCALE: NONE; TOL: ±.010		

**RED INDICATES ORIGINAL**

- BCWS IS SUPPLIED WITH A 15X10.5X5.5 CARRYING CASE AND USER INSTRUCTIONS
- EACH KIT IS SUPPLIED WITH A 13.5 X 10.5 X 4.5 CARRYING CASE AND USER INSTRUCTIONS
- EXAMPLE OF COMPLETE MODEL NO.  
**BWS / C26T 3 A**  
 CABLE RANGE LETTER CODE (SEE TABLE 1)  
 3 = 3-LEVEL FOR TOOL CRIMP  
 2 = 2-LEVEL FOR WRENCH CRIMP  
 OMIT FOR CUTTER HEAD BASIC PART NO C26F  
 CUTTER HEAD BASIC PART NO. (SEE TABLE 3)  
 POWER STRIPPER TOOL:  
 BWS = NI-CAD BATTERY WITH AC & DC CHARGER  
 BCWS = NI-CAD BATTERY AC & DC CHARGER  
 AWS = AC POWER CONVERTER (NORTH & SOUTH AMERICA STD) FOR EUROPEAN CHARGER CONVERTER  
 SPECIFY: BWSLU OR AWSLU FOR UNITED KINGDOM CHARGER/CONVERTER  
 SPECIFY: BWSUK OR AWSUK
- INDIVIDUAL BATTERY OR OPTIONAL POWER SOURCE MAY BE ORDERED AS SHOWN PER TABLE 2
- PORTABLE, HAND HELD, POWERED COAX WIRE STRIPPER KIT WITH AND WITHOUT CUTTER HEAD(S), WITH OPTIONAL POWER SOURCES, SEE TABLE 2
- ALL DIMENSIONS IN INCHES

- REPLACE AND SCRAP EXISTING PLASTIC CAP WITH BLUE ALUMINUM CAP, P/N 010-0194 AND RETURN TO STOCK
- SEE SPECIAL STRIPPING DIMENSIONS
- EACH ITEM MAY BE SOLD SEPARATELY

LETTER CODE	CABLE DIAMETER RANGE (APPROX.)	CABLE TYPES	REFERENCE CABLE GROUP	
			TOOL CRIMP	WRENCH CRIMP
A	.070 / .110	RG-174, RG-178, RG-316, RG-179, M17/93-00001	-001 -003 -004	-5 -5A
I	.110 / .160	RG-180, AT&T 735A, BELDEN 8218 .141 SEMI-RIGID "TZC" BT-2003	-008 -009 -026	-4 -22 -65
B	.160 / .215	TCC-50-2, RG-58, RG-302, RG-303, M17/179-00001 THINNET(9907)	-011 -012	-1 -21
C	.190 / .230	RG-155, RG-141, RG-400, M17/110-2	-011 -012	-1
D	.235 / .270	82190 TCC-75-2(RG-59), RG-6, BELDEN 8212, AT&T 734A, RG-62, S59 HEC	-013 -013A -013B -017 -025	-2 -63
U	.271 / .305	8281 PSF 1/2, AT&T 728 5740, F8SSVV AND AT&T 724 8281-(FLEXIBLE) & EQUIV.	-016	-6
E <b>B</b>	.300 / .430	RG-8, RG-11, RG-213, RG-214 ETHERNET	—	-6A -6B
G	.300 / .430	BELDEN 7731A COMMSCOPE 5906	-05	—

ITEM DESCRIPTION	PART NO		
	NORTH & SOUTH AMERICA	EUROPE	UNITED KINGDOM
AC POWER CONVERTER	AWC-NSA	AWC-EU	AWC-UK
AC CHARGER CORD FOR NI-CAD BATTERY	BWC-NSA	BWC-EU	BWC-UK
AUTO 12V DC CHARGER CORD FOR NI-CAD BATTERY	DWC	DWC	DWC
EXTRA NI-CAD BATTERY PAK WITH CHARGER	EBP-NSA	EBP-EU	EBP-UK
BATTERY CHARGER CONDITIONER	BWCC-NSA		
HAND DRIVER	BWS-DT (BT-2093)		
EXTRA BATTERY	EB	EB	EB

INTERPRET DRAWING PER MIL-STD-100 DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED	TOL: UNLESS SPECIFIED .XX .XXX .XXXX ANGLES MATERIAL: FINISH:
DRAWN PD 11-9-04	CHECKED <i>[Signature]</i> 11-9-04
QUALITY NS 11/10	MANUF <i>[Signature]</i> 11/10
APPROVED <i>[Signature]</i> 11/9/04	
CAD FILE NO 010-0111M1	DO NOT SCALE DWG

**TROMPETER ELECTRONICS, INC.**

TITLE: **BWS/BCWS/AWS POWER STRIPPING TOOL**

SIZE <b>B</b>	CAGE CODE <b>14949</b>	DRAWING NO. <b>010-0111</b>	REV. <b>M</b>
SCALE NONE	DATE: 3/21/95	SHEET 1C	