

**STEP 1**

A. STRIP CABLE TO DIMENSIONS SHOWN

**ASSEMBLY INSTRUCTIONS**

U/BJ1200  
FOR  
SEMI-RIGID CABLE

TROMPETER ELECTRONICS  
INC.

31186 LA BAYA DR. MANTAGE VILLAGE CA 91322-4047  
(818) 707-2020 FAX: 818-709-1040  
REG. CODE NO. 14949

TAI-142

REV A

**ASSEMBLY INSTRUCTIONS**


U/BJ1200/SEMI-RIGID CABLE  
(SEE REVERSE)

**PRODUCTS**  
• PATCH PANELS, PATCH CORDS, JACKS, LOOPING PLUGS  
• POWER DIVIDERS, FE CONNECTORS  
• TERMINAL, TRILAX, QUADRAK COMPONENTS  
• SYSTEMS

**APPLICATIONS**  
• COMPUTERS-TV BRIDGES-CAV-CCTV-ETV  
• COMMUNICATIONS-TELEPHONE-TELEMETRY  
• AIRCRAFT-NUCLEAR AND INDUSTRIAL  
• INSTRUMENTATION  
• PROCESS CONTROL-SECURITY EQUIPMENT  
• AUTOMATIC TESTING-INFORMATION RETRIEVAL  
• MICROWAVE DATA TRANSMISSION


DISK #	ENG	DATE	REV	ED	ADDED	REV A & *MADE IN USA*	DWN	APPROVED	DATE
W10	C		A	10101			AAH	D/49	11/17/92

**STEP 2**

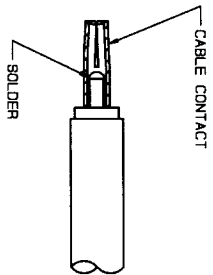

- A. PLACE CABLE CONTACT OVER END OF CENTER CONDUCTOR ON CABLE
- B. SOLDER CABLE CONTACT IN PLACE, MAKING CERTAIN THAT SOLDER DOES NOT APPEAR IN CONTACT SLOTS; OR FINAL ASSEMBLY MAY BE IMPEDED

**STEP 3**

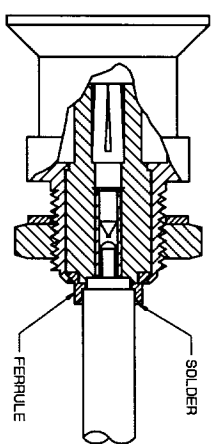

- A. PUSH CABLE ASSEMBLY INTO REAR OF U/BJ1200 THROUGH HOLE IN FERRULE UNTIL BOTTOMED
- B. SOLDER METAL CABLE JACKET ALL AROUND INTO RECESS AT BACK OF FERRULE

MADE IN USA

QTY	DESCRIPTION	PART NUMBER	ITEM
XX	TROMPETER ELECTRONICS, INC.	U/BJ1200 FOR SEMI-RIGID CABLE	REV A
CHK	14949	TAI-142	A
ENGR	APPR	SCALE	SHEET